


RUBINETTI A SFERA 2-VIE Alta Pressione serie MINI / MINI 2-Way high pressure ball valves


	CARATTERISTICHE / SPECIFICATIONS	
	Materiale / Material	Acciaio / Steel
	Grandezza / Size	DN6
	Guarnizione / Sealing	NBR
	Campo di Pressione / Operating pressure	500 bar
Temperatura di utilizzo / Temperature range	-10°C to + 100°C	

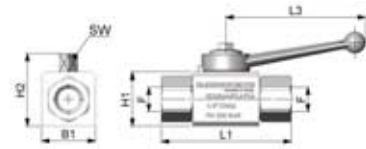

CODICE/CODE	DN	F	L1	L3	B1	H1	H2	PN	SW	Kg
RDH06MRSAP04	6	1/4" - 19	63	57	25	25	32	500 bar	6	0,25

RUBINETTI A SFERA 2-VIE Alta Pressione / 2-WAY high pressure ball valves


	CARATTERISTICHE / SPECIFICATIONS	
	Materiale / Material	Acciaio / Steel
	Grandezza / Size	DN4 up to DN25
	Guarnizione / Sealing	NBR
	Campo di Pressione / Operating pressure	500 bar depending on size
Temperatura di utilizzo / Temperature range	-10°C to + 100°C	

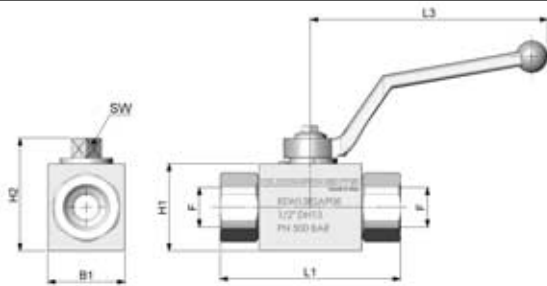

CODICE/CODE	DN	F	L1	L3	B1	H1	H2	PN	SW	Kg
RDH04RSAP02	4	1/8" - 28	71	110	30	35	49	500 bar	9	0,50
RDH06RSAP04	6	1/4" - 19	71	110	30	35	49	500 bar	9	0,50
RDH10RSAP06	10	3/8" - 19	73	110	35	40	54	500 bar	9	0,65
RDH13RSAP08	13	1/2" - 14	83	110	37	43	57	500 bar	9	0,75
RDH20RSAP12	20	3/4" - 14	95	180	45	55	73	400 bar	14	1,40
RDH25RSAP16	25	1" - 11	112	180	55	65	83	350 bar	14	2,20
RDH25RSAP20	25	1 1/4" - 11	120	180	55	65	83	350 bar	14	2,25

RUBINETTI A SFERA 2-VIE Alta Pressione Flangia SAE / 2-WAY high pressure ball valves with SAE Flanges


	CARATTERISTICHE / SPECIFICATIONS	
	Materiale / Material	Acciaio / Steel
	Grandezza / Size	S 3000 / S 6000 from DN20 up to DN 25
	Guarnizione / Sealing	NBR
	Campo di Pressione / Operating pressure	400 bar depending on size
Temperatura di utilizzo / Temperature range	-10°C to + 100°C	

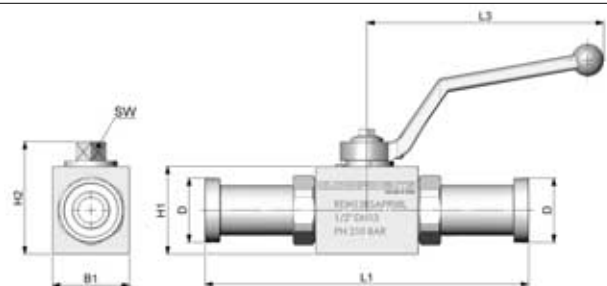

CODICE/CODE	DN	D	L1	L3	B1	H1	H2	PN	SW	Kg
3000										
RDH20RSAPF12L	20	3/4" - 38.1	162	180	45	55	73	210 bar	14	1,668
RDH25RSAPF16L	25	1" - 44.4	178	180	55	35	83	210 bar	14	2,490
6000										
RDH20RSAPF12P	20	3/4" - 41.3	162	180	45	55	73	400 bar	14	1,791
RDH25RSAPF16P	25	1" - 47.6	178	180	55	35	83	350 bar	14	2,685

RUBINETTI A SFERA 3-VIE Alta Pressione / 3-WAY high pressure ball valves

	CARATTERISTICHE / SPECIFICATIONS	
	Materiale / Material	Acciaio / Steel
	Grandezza / Size	DN6 up to DN25
	Guarnizione / Sealing	NBR
	Campo di Pressione / Operating pressure	400 bar depending on size
Temperatura di utilizzo / Temperature range	-10°C to + 100°C	

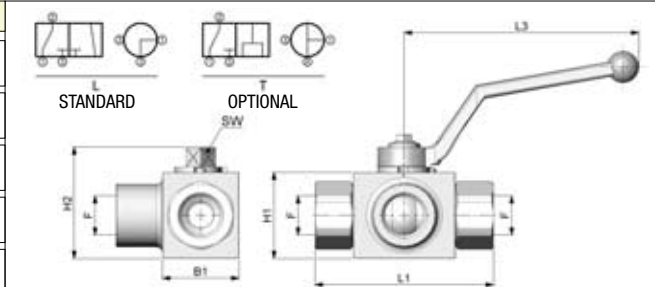

CODICE/CODE	DN	F	L1	L3	B1	H1	H2	PN	SW	Kg
RDH06RS3LAP04	6	1/4" - 19	71	110	30	35	49	400 bar	9	0,50
RDH10RS3LAP06	10	3/8" - 19	73	110	35	40	54	400 bar	9	0,70
RDH13RS3LAP08	13	1/2" - 14	83	110	37	43	57	350 bar	9	0,80
RDH20RS3LAP12	20	3/4" - 14	95	180	45	55	73	350 bar	14	1,50
RDH25RS3LAP16	25	1" - 11	112	180	55	65	83	350 bar	14	2,35
RDH25RS3LAP20	25	1 1/4" - 11	120	180	55	65	83	350 bar	14	2,50

Leve per rubinetti a sfera / Ball valves handles

CODICE / CODE	Lunghezza / Length	Materiale / Material	Trattamento / Treatment	L3	H5	H6	SW	A
RDW09A110ZZ	110	Zinc	Galvanized	110	53	9	9	
RDW09A110FZ	110	Carbon Steel	Galvanized	110	53	9	9	
RDW09A110X	110	Stainless Steel	-	110	53	9	9	
RDW14A180FZ	180	Carbon Steel	Galvanized	180	48	14	14	
RDW14A180X	180	Stainless Steel	-	180	48	14	14	
RDW17A300FZ	300	Carbon Steel	Galvanized	300	71	14	17	
RDW17A300X	300	Stainless Steel	-	300	71	14	17	

CODICE / CODE	Lunghezza / Length	Materiale / Material	Trattamento / Treatment	L3	H5	H6	SW	A
RDW14A200ZZ	200	Zinc	Galvanized	200	53	13	14	
RDW14A330ZZ	330	Aluminium	Red Painted	330	71	14	14	

CODICE / CODE	Lunghezza / Length	Materiale / Material	Trattamento / Treatment	L3	H5	H6	SW	B
RDW14B200AR	200	Aluminium	Red Painted	200		14	14	
RDW17B300FZ	300	Carbon Steel	Galvanized	300		13	17	
RDW17B300X	300	Stainless Steel	-	300		13	17	

CODICE / CODE	Lunghezza / Length	Materiale / Material	Trattamento / Treatment	L3	H5	H6	SW	B
RDW09B145ZZ	145	Zinc	Galvanized	145		10	9	
RDW14B300AR	300	Aluminium	Red Painted	300		14	14	

CODICE / CODE	Lunghezza / Length	Materiale / Material	Trattamento / Treatment	L3	H5	H6	SW	C
RDW06C060ZZ	60	Zinc	Galvanized	60	25,50	8,5	6	
RDW09C060ZZ	60	Zinc	Galvanized	60	25,50	8,5	9	

CODICE / CODE	Lunghezza / Length	Materiale / Material	Trattamento / Treatment	L3	H5	H6	SW	D
RDW09D116ZZ	116	Zinc	Galvanized	116	27,5	13	9	
RDW14D116ZZ	116	Zinc	Galvanized	116	27,5	13	14	

www.olcomponents.com



Rivenditore Specializzato **OLCOMPONENTS**
OLCOMPONENTS Qualified Dealer

OLEOMARKET srl
LENTIGIONE (RE) Italy
Tel. +39 0522 680821
www.olmark.com



**Rubinetti a sfera 2/3 vie
ad alta pressione**
2/3 Way High Pressure Ball Valves